



EM-IND-I43

Fanless Industrial Small Form Factor PC



Specification


Chassis	Dimensions (W x L x H): 219 x 180 x 76 mm
	Colour: silver / black / on request (min. 20 pcs)
	Material: anodized aluminium, IP50 protected
	4x rubber feet
	Weight netto: TBD
Drive bays internal positions	1x m.2 2280 SSD
	MB: 170 x 170mm, mini-ITX form factor (Kontron D3543-S)
	Integrated I/O shield
Front panel	Power button with LED backlight
	Optional: 4x USB 2.0, 2x USB 3.1 Gen1, 2x RS232 (option)
Rear panel	2x DisplayPort V1.2
	2x GLAN, 2x USB 2.0, 2x USB 3.1 Gen1, 2x PS/2, 2x RS232
	DC-In connector 8-36V (5A max), Audio (Line in/out)
Mounting options	Wall mount (pair)
	VESA holder
	DIN clip kit
	other customization: (min. 20 pcs)

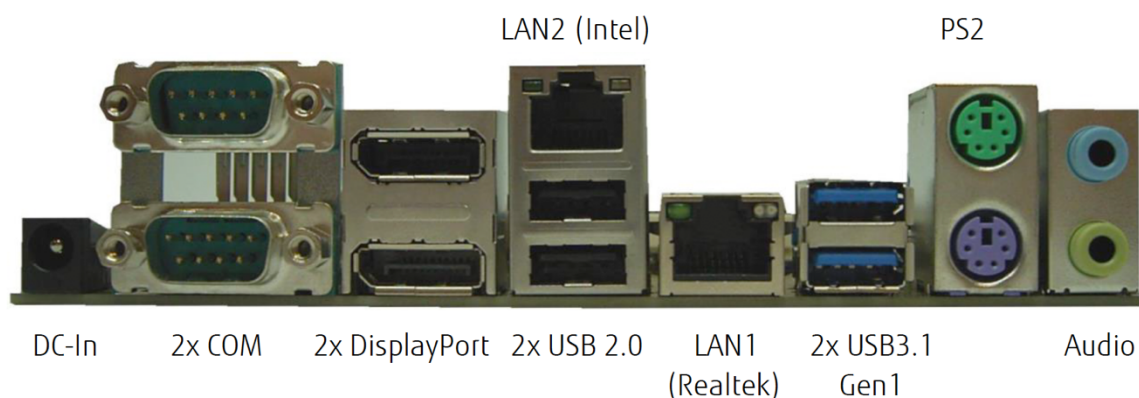

All product specifications are subject to change without notice.


Mainboard

D3543-S mini-ITX

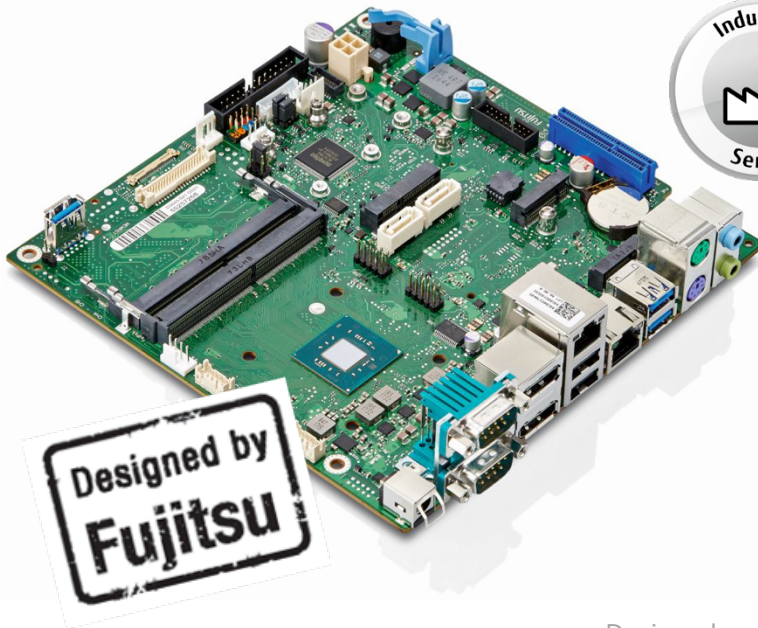

Designed and approved for 24/7 continuous operation @ 0-60°C

Supported Memory	2x DDR4 2400 SDRAM (SO-DIMM), up to 24GB
CPU options	Intel® Celeron® Processor J4005 (DC @2.7GHz) integrated Intel® UHD Graphics 600 (12EUs @700MHz)
	Intel® Celeron® Processor J4105 (QC @2.5GHz) integrated Intel® UHD Graphics 600 (12EUs @750MHz)
	Intel® Pentium® Silver Processor J5005 (QC @2.8GHz) integrated Intel® UHD Graphics 605 (18EUs @800MHz)
I/O Interface	2x DisplayPort V1.2
	Audio: Line in / Line out, Realtek ALC671 HDAC
	6x USB 2.0 (4x opt.), 4x USB 3.1 Gen1 (2x opt.) 4x COM RS232 (2x option, RS422/485 support), 2x PS/2
	2x SATA III - 6Gbs
	M.2 SSD 2280 (supports 2280/2260/2242, Key-B, SATA/PCIe)
	M.2 2230 module (WiFi / Bluetooth option)
	2x GbE LAN onboard (Intel i210 / Realtek RTL8111G)
External DC Input (8-36V, max. 5A)	
Product features	System Guard, Wake-on-LAN (WoL)
	HW Watchdog / Intel® TPM V2.0 onboard

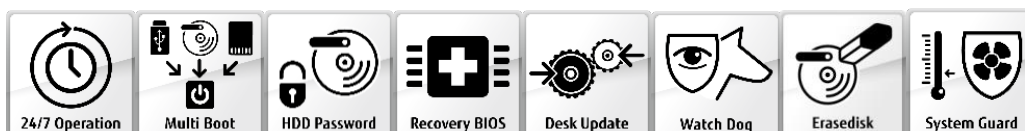

All product specifications are subject to change without notice.