

1. Intel® Bay Trail N2930 SoC processor
2. 1 * DDR3L 1333MHz Dual CH up to 8GB
3. Integrated Realtek ALC887 HD Audio CODEC with 2-CH
4. 2 * HDMI
5. 1 * SATAII
6. 1 * USB3.0, 3 * USB2.0, 1 * COM Port, 2 * Realtek® RTL8119I GbE
7. 9~24V Wide range DC-in PWR jack
8. NUC Form Factor (101mm * 101mm)




Rear I/O



Front I/O



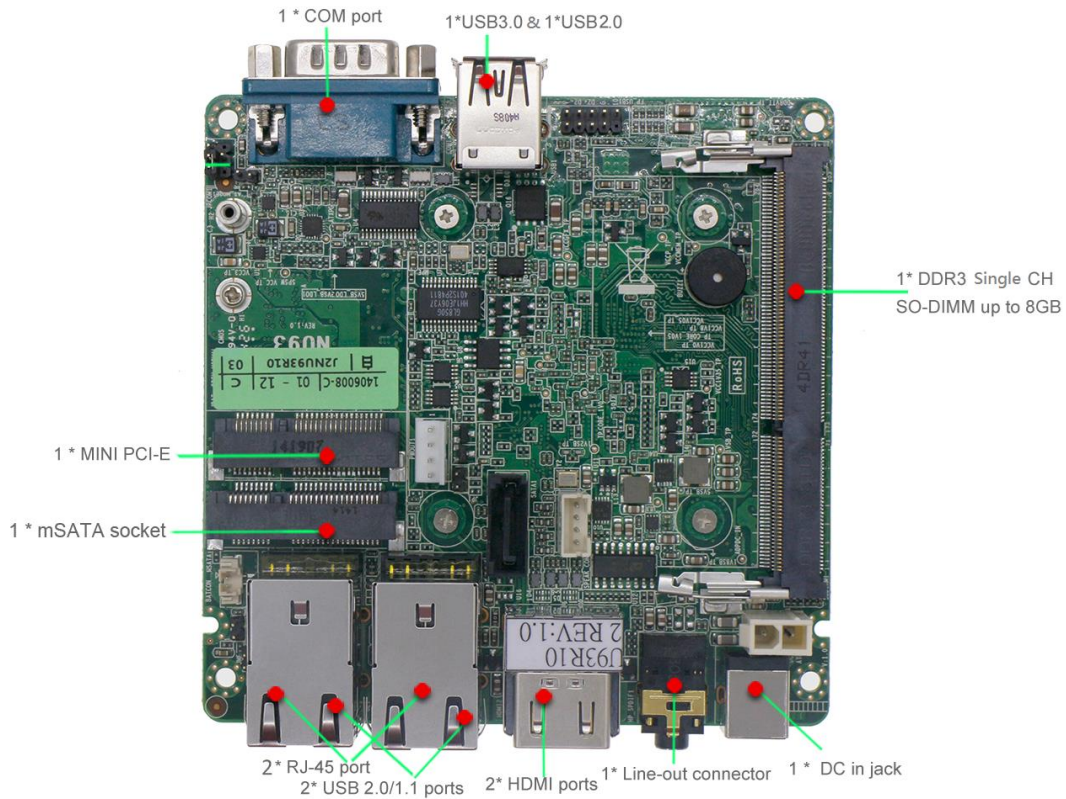

Product Specifications

Form Factor

Dimensions - NUC (101 * 101 mm)

Processor System

CPU	- Intel® Baytrail N2930 SoC Processor - Supports Hyper-Threading Technology
Core Number	- 4
Max Speed	- 2.16GHz
L2 Cache	- 2MB
Chipset	- N/A
BIOS	- UEFI

Expansion Slot

Mini-PCIe	- 1 (half size)
mSATA	- 1 (full size)

Memory

Technology	- Dual Channel DDR3L 1333MHz SDRAM
Max.	- 8GB
Socket	- 1 * SO-DIMM slot

Graphics

Controller	- Intel® HD Graphics
VRAM	- Shared Memory
HDMI	- 2, Support Max. resolution 1920 * 1200

MultiDisplay	- Yes (Dual Display)
Ethernet	
Ethernet	- 10/100/1000 Mbps
Controller	- Realtek® RTL8119I GbE
Connector	- 2 * RJ45
SATA	
Max Data Transfer Rate	- 1 * SATAII (3.0GB/s)
Front I/O	
USB	- 1 * USB 3.0, 1 * USB2.0
Serial	- 1 (Support RS232/422/485, 5V/12V Selectable)
Rear I/O	
HDMI	- 2
Ethernet	- 2
USB	- 2 * USB 2.0
Audio	- 1 (Line-out)
DC-input	- 1
Internal Connector	
USB	- 2 * USB 2.0
SATA	- 1 * SATAII (3.0GB/s)
mPCIe	- 1 (half size)
mSATA	- 1 (full size)
Audio Header	- 1 (Support 3W Amplifier)
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
Power Requirements	
Input PWR	- +9~24V DC-in (2-pin PWR Con)
Power On	AT/ATX Supported - AT: Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: -20°C ~ 60°C - Storage: -40°C ~ 70°C - Humidity: 10% ~ 90% RH @40°C (non-condensing)

- For further information please visit the website at <http://www.jetway.com.tw>
- The Specification may be changed without further notice.

Standard Accessories				
Parts	SATA cable	SATA Power cable		
P/N	G01-SATAL-RD30-F	G01-XH4-SA15-35F		